

RAIL JOINT DETAIL
 DETAIL B

2 x 8 PRESSURE TREATED TOP RAIL

POST SLEEVE

6.5

RAILS ARE SECURED TO POST SLEEVES USING 4 - 5/16" CARRIAGE BOLTS AND WASHERS

POST SLEEVES ARE IS SECURED TO POST USING 2 - 1/4" BOLTS AND LOCK WASHERS

96.0

96.0

POST CAP

2 X 8 PRESSURE TREATED RAILS

10.0



36.0

GRADE

48.0

Ø3 1/2" GALVANIZED STEEL POST

ALL POSTS INSTALLED BY DRIVEN METHOD

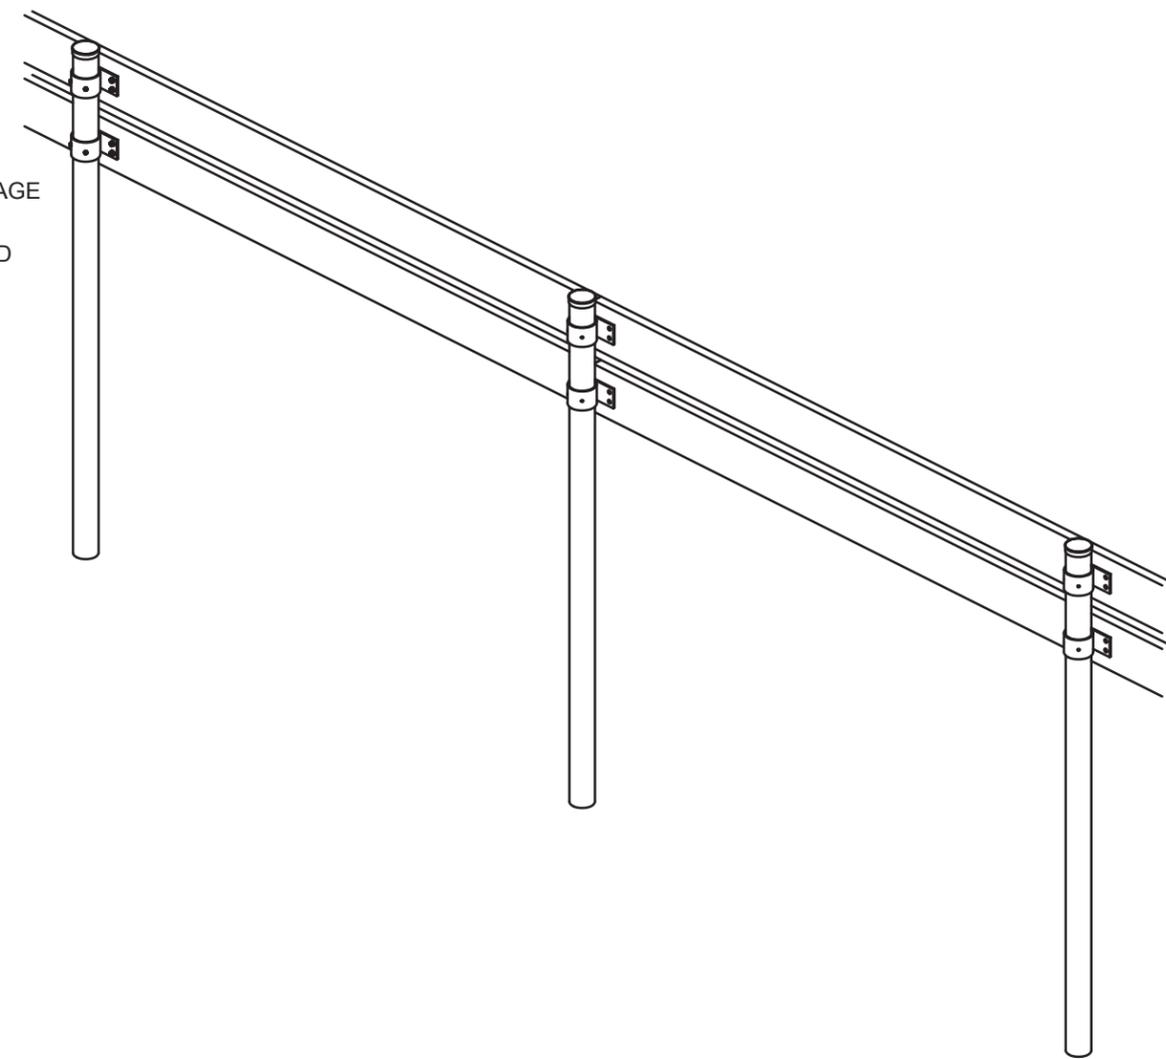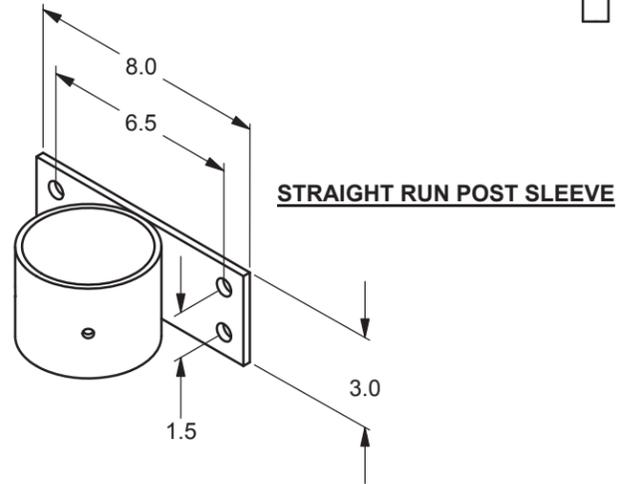

90 Lowson Crescent,
 Winnipeg, Manitoba, Canada R3P 2H8
 Phone: 1-800-406-2342
 Fax: 1-204-284-1868
 Web: www.wallacefences.com

Description:		3 FT. BUMPER FENCE	
		2 RAIL	
Customer / Project Name:			
-			
Finish:		Date:	
-		0/14/2012	
Drawing No.		Rev.	Sheet:
3BF8-02-14-12		-	1 of 1